


LYON INDUSTRIES

The Shim Source

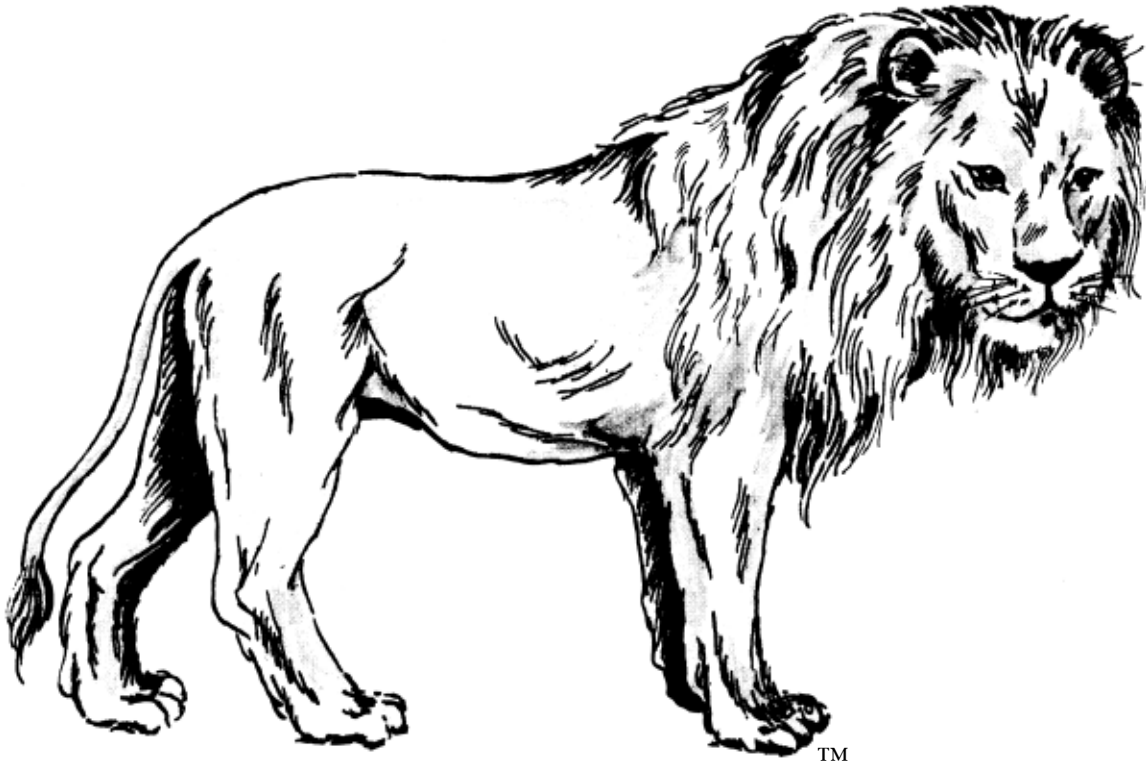

TM

Since 1968

Stainless Steel Shim Stock

Stainless Steel

6" x 50" rolls			6" x 100" rolls		12" x 50" rolls		12" x 100" rolls	
Thickness	Part No.	Wt./Lbs	Part No.	Wt./Lbs	Part No.	Wt./Lbs	Part No.	Wt./Lbs
0.0005/.0127mm	SS-X	.04	SSH-X	.09	SSW-X	.09	SSHW-X	.18
0.001/.025mm	SS-1	.09	SSH-1	.18	SSW-1	.18	SSHW-1	.36
0.0015/.038mm	SS-1X	.14	SSH-1X	.28	SSW-1X	.28	SSHW-1X	.56
0.002/.051mm	SS-2	.18	SSH-2	.36	SSW-2	.36	SSHW-2	.72
0.003/.076mm	SS-3	.26	SSH-3	.52	SSW-3	.52	SSHW-3	1.04
0.004/.102mm	SS-4	.35	SSH-4	.70	SSW-4	.70	SSHW-4	1.40
0.005/.127mm	SS-5	.44	SSH-5	.88	SSW-5	.88	SSHW-5	1.76
0.006/.152mm	SS-6	.53	SSH-6	1.06	SSW-6	1.06	SSHW-6	2.12
0.007/.178mm	SS-7	.62	SSH-7	1.24	SSW-7	1.24	SSHW-7	2.48
0.008/.203mm	SS-8	.70	SSH-8	1.40	SSW-8	1.40	SSHW-8	2.80
0.009/.229mm	SS-9	.79	SSH-9	1.58	N/A	-	N/A	-
0.010/.254mm	SS-10	.88	SSH-10	1.76	SSW-10	1.76	SSHW-10	3.52
0.012/.305mm	SS-12	1.05	SSH-12	2.10	SSW-12	2.10	SSHW-12	4.20
0.015/.381mm	SS-15	1.32	SSH-15	2.64	SSW-15	2.64	SSHW-15	5.28
0.020/.508mm	SS-20	1.76	SSH-20	3.52	SSW-20	3.52	SSHW-20	7.04
0.025/.635mm	SS-25	2.19	SSH-25	4.38	SSW-25	4.38	SSHW-25	8.76
0.031/.787mm	SS-31	2.72	SSH-31	5.44	SSW-31	5.44	SSHW-31	10.88

Assortments

SS/EC

Weight: .97 lbs

6" x 50" assortment contains one piece of each of the following sizes:

.001, .002, .003, .005

SSA-8

Weight: 1.45 lbs

6" x 12" assortment contains one piece of each of the following sizes:

.001, .002, .003, .005, .008, .010, .015, .020

SSA-12

Weight: 2.06 lbs

6" x 12" assortment contains one piece of each of the following sizes:

.001, .0015, .002, .003, .004, .005, .006, .007, .008, .010, .012, .015

SSA-15

Weight: 3.23 lbs

6" x 12" assortment contains one piece of each of the following sizes:

.001, .0015, .002, .003, .004, .005, .006, .007, .008, .010, .012, .015, .020, .025, .031




Material Guide:

- Type 302 Full Hard.
- Approximate Rockwell hardness of C 40-45.
- Tensile strength 185,000 PSI minimum.
- Yield strength 140,000 PSI minimum.
- Complies with ASTM A-666 and AMS-5906, QQ-S-766.

Flat Pieces

6" x 25" (2 pcs/pk)			6" x 25" (10 pcs/pk)	
Thickness	Part No.	Wt./Lbs	Part No.	Wt./Lbs
.010/.254mm	SSF-10	.88	SSFP-10	4.40
.012/.305mm	SSF-12	1.05	SSFP-12	5.25
.015/.381mm	SSF-15	1.32	SSFP-15	6.60
.020/.508mm	SSF-20	1.76	SSFP-20	8.80
.025/.635mm	SSF-25	2.19	SSFP-25	10.95
.031/.787mm	SSF-31	2.72	SSFP-31	13.60



Lyon Industries

800-FOR-LYON

Ph: 800-367-5966 Fax: 847-695-5966

www.lyonindustries.com